

# Saunová kamna VEGA

www.finskasauuna.cz







Model s regulací na plášti

Model E bez regulace



Model	BC45	BC45E	BC60	BC60E	BC80	BC80E	BC90	BC90E
Výstup kW	4,5	4,5	6	6	8	8	9	9
Velikost sauny min m <sup>3</sup>	3	3	5	5	7	7	8	8
Velikost sauny max m <sup>3</sup>	6	6	8	8	12	12	14	14
Min.výška sauny cm	190	190	190	190	190	190	190	190
Prostor pro kameny max kg	25	25	25	25	25	25	25	25
Rozměry šířka mm	480	450	480	450	480	450	450	450
Rozměry šířka mm	540	540	540	540	540	540	540	540
Rozměry hloubka mm	310	310	310	310	310	310	310	310
Váha kg	11	11	11	11	11	11	11	11
Vstupní napájení 3-fáze	400 V 3N	400 V 3N	400 V 3N	400 V 3N	400 V 3N	400 V 3N	400 V 3N	400 V 3N
Napájecí kabel průřez mm <sup>2</sup>	5 x 1,5	5 x 1,5	5 x 2,5	5 x 2,5	5 x 2,5	5 x 2,5	5 x 4	5 x 4
Pojistka A	3 x 10	3 x 10	3 x 10	3 x 10	3 x 16	3 x 16	3 x 16	3 x 16
Kontrolní jednotka	-	C90,CA15,Griffin CG170, C150, C150VKK, C105S	-	C90,CA15,Griffin CG170, C150, C150VKK, C105S	-	C90,CA15,Griffin CG170, C150, C150VKK, C105S	-	C90,CA15,Griffin CG170, C150, C150VKK, C105S
Bezpečnostní vzdálenost A ke stěně mm	35	35	50	50	100	100	120	120
Bezpečnostní vzdálenost B k dolní lavičce mm	20	20	30	30	30	30	40	40
Bezpečnostní vzdálenost C k horní lavičce mm	35	35	50	50	80	80	100	100
Bezpečnostní vzdálenost ke stropu v mm	1100	1100	1100	1100	1100	1100	1100	1100
Bezpečnostní vzdálenost k podlaze mm	80	80	80	80	80	80	80	80

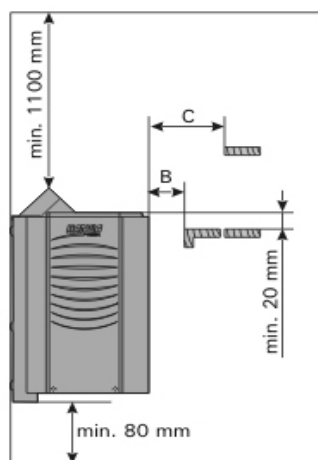

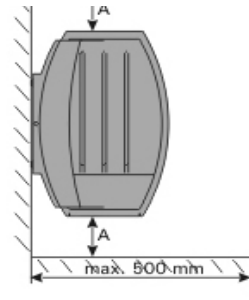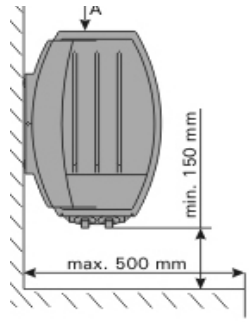

TYPE	A min. mm
BC45/BC45E	35
BC60/BC60E	50
BC80/BC80E	100
BC90/BC90E	120

\_\_\_\_\_